



AF49-1014

In-tank/external pump 675 HP on 98 RON fuel

Code NO.:AF49-1014

TESTING PARAMETER:
TESTING VOLTAGE:13.5V


PRESSURE(Psi)	0	14.5	29	43.5	58	72.5	87
PRESSURE(BAR)	0	1	2	3	4	5	6
FLOW(GPH)	92.4	89.8	84.5	79.2	73.9	68.7	63.4
FLOW(L/H)	350	340	320	300	280	260	240
CURRENT(A)	8.2	8.6	9.9	11.3	12.7	14.2	15.5

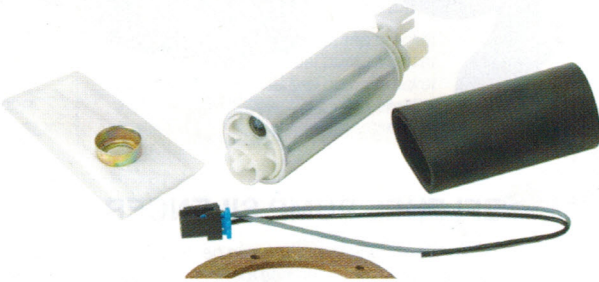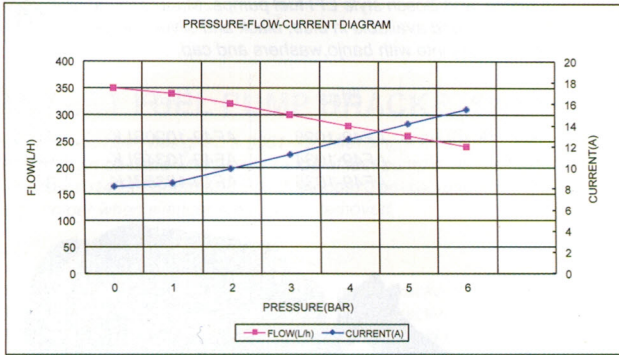

OE REPLACEMENT EFI PUMPS


Part No Description

AF49-1021 In-tank to suit Holden Commodore VN-VS
Standard replacement

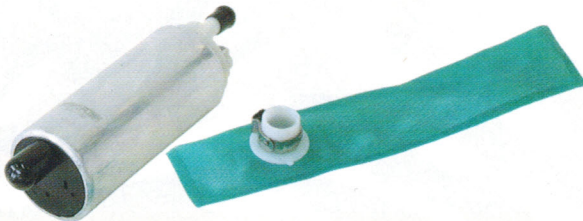


Part No Description

AF49-1022 In-tank to suit Ford Falcon EA-EL Standard replacement

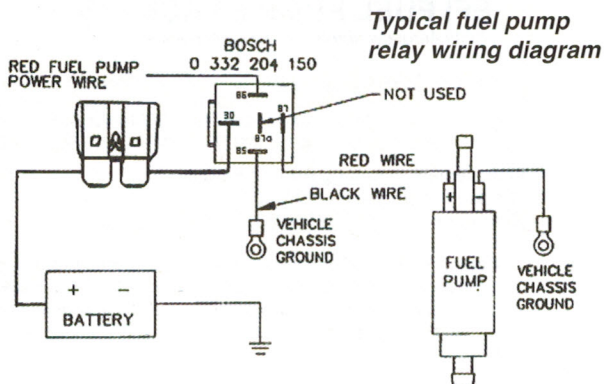

AF49-1037

Aeroflow's filter sock is designed to be used with the AF49-1014 or the bosch 044 high performance fuel pumps. This high flow 60 micron synthetic filter screen features an internal support to keep the filter from sucking closed and reducing fuel flow. The kit is supplied with an anodised black M18 x 1.5 adapter that is safe for use with corrosive fuels and seals with a supplied nylon washer. Screen size is 135mm long by 57mm (2-1/4") wide and gives you reassurance on fuel pump life, a perfect addition when installing fuel pumps in-tank.

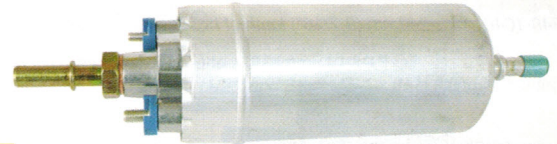


HIGH PRESSURE BIO-DIESEL PUMP

Great for use with diesel fuel systems. Features 7.93mm (5/16") male EFI style inlet and outlet fitting.

Part No Description

AF49-1032 High pressure in-line diesel pump

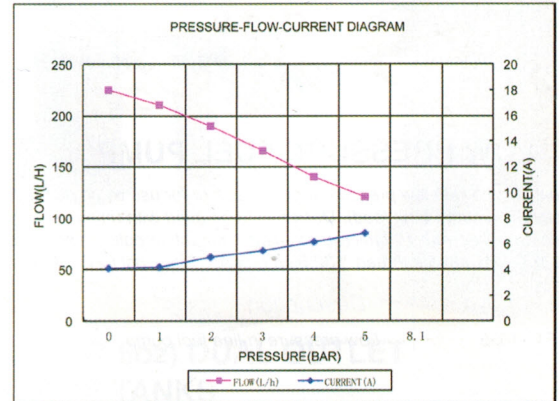

AF49-1042

In-tank pump, inlet screen & harness 750hp plus on Flex fuel

